




6W 3000K Warm White
6W 4000K Daylight
6W 6500K Cold White

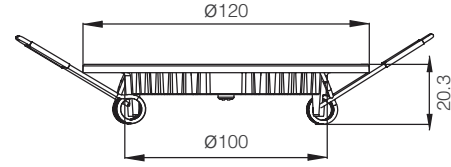

 %85 Energy - Saving

Technical Specifications	DC06.0W-02005	DC06.0W-08005	DC06.0W-01005
Rated Current	55mA	55mA	55mA
Class	A+	A+	A+
Consumption	6kWh/1000h	6kWh/1000h	6kWh/1000h
Service Life	20.000 hours	20.000 hours	20.000 hours
CRI	≥ 80	≥ 80	≥ 80
Power Factor	> 0.5	> 0.5	> 0.5
Starting Time	< 1sec.	< 1sec.	< 1sec.
Operating Voltage Range	100-240VAC	100-240VAC	100-240V
Rated Voltage	AC230V 50Hz	AC230V 50Hz	AC230V 50Hz
Rated Power	6 W	6 W	6 W
Lumen	420	420	450
Luminous Colour	Warm White	Daylight	Cold White
Chrominance Signal	WW	NW	CW
Colour Temperature	3000K	4000K	6500K
Body Colour	White/RAL 9016	White/RAL 9016	White/RAL 9016
Body Material	Aluminum	Aluminum	Aluminum
IP Definition	IP40	IP40	IP40

Product Name	Code No.	Piece in Box	Piece in Package	Gross Weight (kg)	Size of Package (mm)
Led Slim Downlight					
6W 3000K Warm White	DC06.0W-02005	1	48	11,61	260 x 565 x 345
6W 4000K Daylight	DC06.0W-08005	1	48	11,61	260 x 565 x 345
6W 6500K Cold White	DC06.0W-01005	1	48	11,61	260 x 565 x 345